




CARTEC

GPS 500 - Speedometer Test Stand for Motorbikes and Scooters

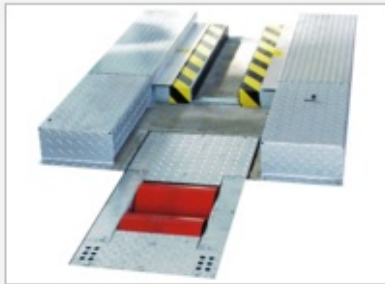

Key Features

- One-part self-supporting galvanised roller set
- Painted rollers
- Electronic controller
- User software
- Quick and precise speed measuring
- Simulation of tractive resistance
- RS-232 interface

Specifications

Temperature range from (°C)	40
Temperature range to (°C)	5
Max. deceleration (kW)	5
Roller diameter (mm)	190
Test speed (km/h)	0 - 80
Measurement control	Microprozessor
Indication via PC	yes
Electrical connection	230 V / 50 Hz
Fuse rating (A)	5
Corrosion preventing	DIN 50976-t Zno
Length (mm)	1025
Width (mm)	490

Options

- Air stream blower
- Mechanical motorcycle fastener
- Pneumatical motorcycle fastener

Delivery

- Roller set
- Electronic controller
- User software

Pedidos:

AME
AUTO MAPRO EQUIPS
 ☎ 93 784 49 37
automaproequips@automaproequips.com
www.automaproequips.com