



CARTEC

BDE 500 B-WV - Roller brake tester for motorcycles, PC version, prepared for weighing system

Key Features

- Control unit integrated in E box
- Zinc-coated roller set
- Rollers with expanded metal mesh and long-life plastic coating
- Splash-proof motor
- Rust-proof feeler rolls
- Interface for printer
- Determination of rolling friction (heavy brake)
- Determination of ovality (drum / disc)

Specifications

Brake tester - Axle weight max. (kg)	1000
Brake tester - Roller diameter (mm)	206
Brake tester - Roller length (mm)	300
Brake tester - Roller coefficient: dry / wet	> 0.6
Brake tester - Idling speed (km/h)	5.5
Brake tester - Power supply (V / Hz)	400 / 50
Brake tester - Supply lead (mm ²)	5 x 2.5
Brake tester - Fuse rating, slow-blow (A slow-blow)	16
Brake tester - Motor power (kW)	2.5
Brake tester - Height (mm)	260
Brake tester - Width (mm)	1020
Brake tester - Depth (mm)	560
Brake tester - Weight (kg)	150
Control cabinet (E box) - Height (mm)	650
Control cabinet (E box) - Width (mm)	500
Control cabinet (E box) - Depth (mm)	200
Control cabinet (E box) - Weight (kg)	30

Options

- Motorcycle fastener - pneumatically controlled
- Pedal pressure transducer
- Hand operated force transducer
- Infrared remote control
- PC cabinet to accommodate PC equipment
- PC equipment

Delivery

Analogue display cabinet, display range 0 - 3 kN

Roller set

15 m connecting lead


Versions

With weighing unit system

With weighing system preparation

230 V / 50 Hz

Similar products

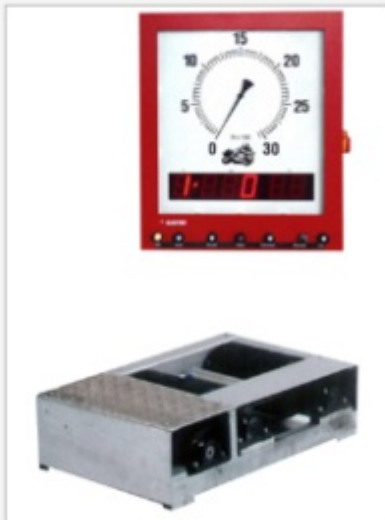

BDE 500 K-WV

Analogue display: display range 0 - 3 kN, Zinc-coated mechanics, Idle running speed ca. 5.5 km/h, Motor power 2.5 kW, Power supply 400 V / 50 Hz

Pedidos:

ampe
AUTO MAPRO EQUIPS

☎ 93 784 49 37

automaproequips@automaproequips.com

www.automaproequips.com